


Zee Flower DMX Protocol

Mode 0 (6ch)

Ch 1	Beam Rotate	0(0%)	Stop						
		1(1%)					126(48%)		
		127(49%)	Stop				128(50%)		
		129(51%)					254(99%)		
		255(100%)	Stop				255(100%)		
Ch 2	Dimmer (ALL)	0(0%)					255(100%)		
Ch 3	Color (ALL)	 Open 0(0%)	 Dark Blue 13(5%)	 Red 27(10%)	 Light Amber 40(15%)	 Blue 53(20%)			
		 Green 67(25%)	 Magenta 81(31%)	 Yellow 93(36%)	 Light Blue 108(41%)	 Mauve 121(47%)			
		 Lime Green 134(52%)	 Amber 148(57%)	 Purple 161(63%)	 CTB 175(68%)	 CTO 188(73%)			
		203(79%)					227(88%)		
		228(89%)	Stop				230(90%)		
		231(91%)					255(100%)		
		Ch 4	Prism (ALL)	0(0%)					255(100%)
		Ch 5	Lamp Control (ALL)	128(50%)	3秒保持で Lamp OFF				
255(100%)	3秒保持で Lamp ON								
Ch 6	Reset	250(95%)	3秒保持で Reset						

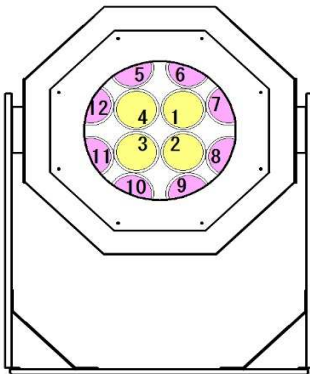

Mode 1 (9ch)			Mode 2 (39ch)		
Ch 1	Beam Rotate		Ch 1	Beam Rotate	
Ch 2	内側	Dimmer	Ch 2	1	Dimmer
Ch 3		Color	Ch 3		Color
Ch 4		Prism	Ch 4		Prism
Ch 5		Dimmer	Ch 5		2
Ch 6	外側	Color			
Ch 7		Prism			
Ch 8		Lamp Control			
Ch 9	Reset	Ch 36	12	Color	
		Ch 37		Prism	
		Ch 38	Lamp Control		
		Ch 39	Reset		